


McBerns Odour Filter.

Suits 300mm Pump Station Vents

**This Filter has a replaceable media section.
When filter ceases to be effective a replacement media cartridge is available.**

Installation Instructions

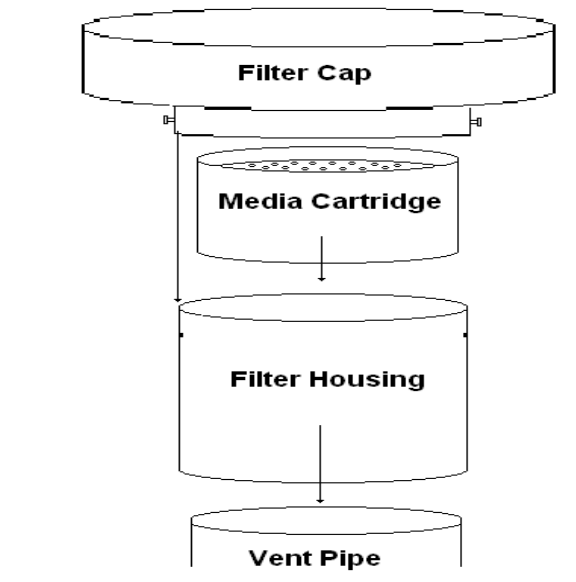

SAFETY ADVICE: PLEASE READ BEFORE INSTALLING

Ensure adequate ventilation when removing filter from pack and installing.

Be careful to avoid contact with contents, or fumes from the filter as they may cause irritation to eyes, skin or breathing passages.

Do not puncture the container or otherwise interfere with the product as this will reduce its effectiveness or produce harmful vapours.

INSTALLATION INSTRUCTIONS

1. With a knife remove clear plastic from top and bottom of Media Cartridge.
2. Slide Media Cartridge into Filter Housing.
3. Push Filter Cap onto Filter Housing and secure with 2 S/S screws.
4. Install Filter Housing securely to sewer vent and seal joint to ensure all gases exit through the Filter.

MAINTENANCE: We suggest

1. Monthly inspection to check physical condition of filter and integrity of the installation.
2. Monthly check for any odour emission. When unacceptable emission is detected, filter cartridges should be replaced.
3. Refer to our installation instructions above for cartridge replacement procedure.

Manufactured by:
McBerns Pty Ltd (ABN 56060984107)
PO Box 304 Yandina Qld 4561 Australia
Phone: 61 (0)7 54467167 Fax: 61 (0)7 54467162
Email: mail@mcbarns.com